

## RE03B

### TYPE OF SENSOR

BALANCED DIFFERENTIAL (SERIES OPPOSED TYPE.)

### PHYSICAL CONFIGURATION

- 1) PACKAGE : TO - 5 METAL CAN WITH DIMENSIONS SHOWN IN FIGURE 1-C (NICKEL-PLATED)
- 2) ELEMENT GEOMETRY : TWO SENSITIVE AREAS 2. 0 M LONG, 1. 0 M WIDE AND SPACED 1. 0 M APART.
- 3) ELEMENT ORIENTATION : SEE FIGURE 1 - B
- 4) LEAD CONFIGURATION : SEE FIGURE 1-C, 1-D

### ELECTRICAL CHARACTERISTICS (AT $25 \pm 5$ °C)

- 1) CIRCUIT CONFIGURATION : THREE-TERMINAL SENSOR WITH SOURCE FOLLOWER SEE FIGURE 2
- 2) OPERATING VOLTAGE : 3 ... 10 V DC ( $R_s$  : 47 K $\Omega$ )
- 3) SOURCE VOLTAGE : 0. 3 ... 1. 4 V ( $V_D$  : 5V,  $R_s$  : 47 K $\Omega$ )
- 4) SIGNAL OUTPUT : MIN. 2. 6 Vp - p (TYP. 4. 0 Vp - p)

SIGNAL OUTPUT IS MEASURED AT CHOPPER FREQUENCY OF 1 Hz WHEN CONNECTED TO THE AMPLIFIER OF GAIN 72. 5 dB (AT 1 Hz) AND SUBMITTED TO THE EMISSION OF INFRARED ENERGY OF  $13 \mu W/P$  FROM 420 K BLACK BODY.

SEE FIGURE 3

- 5) NOISE OUTPUT : MAX. 250 mVp - p (TYP. 90 mVp - p)

NOISE OUTPUT SHALL BE MEASURED FOR 20 SECONDS WHEN CONNECTED TO THE AMPLIFIER OF GAIN 72. 5 dB AND SHUT OUT FROM INFRARED ENERGY.

SEE FIGURE 3

- 6) BALANCE OUTPUT : MAX. 10 %

$$\left( \frac{BO}{|SA+SB|} \right) \div 0. 1$$

BO : BALANCE OUTPUT

SA : SIGNAL OUTPUT ON ELEMENT A

SB : SIGNAL OUTPUT ON ELEMENT B

BALANCE OUTPUT IS MEASURED AT CHOPPER FREQUENCY OF 1 Hz WHEN CONNECTED TO THE AMPLIFIER OF GAIN 72. 5 dB ( AT 1 Hz ) AND SUBMITTED TO THE EMISSION OF INFRARED ENERGY OF  $13 \mu W/P$  FROM 420 K BLACK BODY.

SEE FIGURE 3

- 7) FREQUENCY RESPONSE : 0. 3 Hz TO 3. 0 Hz /  $\pm 10$  dB

### OPTICAL CHARACTERISTICS

- 1) FIELD OF VIEW : 44° FROM EDGE OF ELEMENT ON AXIS X, Y  
: 38° FROM EDGE OF ELEMENT ON  
45° : SEE FIGURE 1 - A
- 2) FILTER SUBSTRATE : SILICON
- 3) CUT ON (5 % T ABS) :  $5. 0 \pm 0. 5 \mu m$
- 4) TRANSMISSION : : 70 % AVERAGE  $7 \dots 14 \mu m$

### ENVIRONMENTAL REQUIREMENTS

- 1) OPERATING TEMPERATURE : -30 °C TO + 70 °C
- 2) STORAGE TEMPERATURE : -40 °C TO + 80 °C
- 3) RELATIVE HUMIDITY : THE SENSOR SHALL OPERATE WITHOUT INCREASE IN NOISE OUTPUT WHEN EXPOSED TO 90 ... 95 % RH AT 30 °C CONTINUOUSLY.
- 4) HERMETIC SEAL : THE SENSOR SHALL BE SEALED TO WITHSTAND A VACUUM OF 160

# RE03B 紅外探測器使用說明書

## SPECIFICATION OF PYROELECTRIC PASSIVE INFRARED SENSOR

MODEL NO. RE03B

### SCOPE

THIS SPECIFICATION DESCRIBES A PYROELECTRIC PASSIVE INFRARED SENSOR SUPPLIED BY NIPPON CERAMIC CO., LTD.

### TYPE OF SENSOR

BALANCED DIFFERENTIAL (SERIES OPPOSED TYPE.)

### PHYSICAL CONFIGURATION

- 1) PACKAGE : TO-5 METAL CAN WITH DIMENSIONS SHOWN IN FIGURE 1 C (NICKEL-PLATED)
- 2) ELEMENT GEOMETRY : TWO SENSITIVE AREAS 2.0 mm LONG, 1.0 mm WIDE AND SPACED 1.0 mm APART.
- 3) ELEMENT ORIENTATION : SEE FIGURE 1-B
- 4) LEAD CONFIGURATION : SEE FIGURE 1-C, 1-D

### ELECTRICAL CHARACTERISTICS (AT 25 ± 5 °C)

- 1) CIRCUIT CONFIGURATION : THREE-TERMINAL SENSOR WITH SOURCE FOLLOWER  
SEE FIGURE 2
- 2) OPERATING VOLTAGE : 3 ~ 10 V DC (RS: 47KΩ)
- 3) SOURCE VOLTAGE : 0.3 ~ 1.4 V (VS: 5V, RS: 47KΩ)
- 4) SIGNAL OUTPUT : MIN. 2.5 V<sub>p-p</sub> (TYP. 4.0 V<sub>p-p</sub>)

SIGNAL OUTPUT IS MEASURED AT CHOPPER FREQUENCY OF 1 Hz WHEN CONNECTED TO THE AMPLIFIER OF GAIN 72.5 dB (AT 1 Hz) AND SUBMITTED TO THE EMISSION OF INFRARED ENERGY OF 13 μW/cm<sup>2</sup> FROM 420 K BLACK BODY.  
SEE FIGURE 3

- 5) NOISE OUTPUT : MAX. 250 mV<sub>p-p</sub> (TYP. 90 mV<sub>p-p</sub>)

NOISE OUTPUT SHALL BE MEASURED FOR 20 SECONDS WHEN CONNECTED TO THE AMPLIFIER OF GAIN 72.5 dB AND SHUT OUT FROM INFRARED ENERGY.  
SEE FIGURE 3

- 6) BALANCE OUTPUT : MAX. 10 %

100% / |SA-SB| ≤ 0.1  
BO : BALANCE OUTPUT  
SA : SIGNAL OUTPUT ON ELEMENT A  
SB : SIGNAL OUTPUT ON ELEMENT B

BALANCE OUTPUT IS MEASURED AT CHOPPER FREQUENCY OF 1 Hz WHEN CONNECTED TO THE AMPLIFIER OF GAIN 72.5 dB (AT 1 Hz) AND SUBMITTED TO THE EMISSION OF INFRARED ENERGY OF 1.1 μW/cm<sup>2</sup> FROM 420 K BLACK BODY.  
SEE FIGURE 3

- 7) FREQUENCY RESPONSE : 0.3 Hz TO 3.0 Hz / ± 10 dB

### OPTICAL CHARACTERISTICS

- 1) FIELD OF VIEW : 44° FROM EDGE OF ELEMENT ON AXIS X  
38° FROM EDGE OF ELEMENT ON AXIS Y  
SEE FIGURE 1-A
- 2) FILTER SUBSTRATE : SILICON
- 3) CUT ON (5 ST ABS) : 5.0 ± 0.5 μm
- 4) TRANSMISSION : ≥ 70 % AVERAGE 7~11 μm

### ENVIRONMENTAL REQUIREMENTS

- 1) OPERATING TEMPERATURE : -30 °C TO +70 °C
- 2) STORAGE TEMPERATURE : -40 °C TO +80 °C
- 3) RELATIVE HUMIDITY :  
THE SENSOR SHALL OPERATE WITHOUT INCREASE IN NOISE OUTPUT WHEN EXPOSED TO 90 ~ 95 % RH AT 30 °C CONTINUOUSLY.
- 4) HERMETIC SEAL :  
THE SENSOR SHALL BE SEALED TO WITHSTAND A VACUUM OF 21.28 kPa.

香港地址：香港九龍旺角塘尾道 54-58 號永利工業大廈 1405 室 TEL: (852) 23982562 FAX: (852) 23981536


E-mail: [cwau5865@netvigator.com](mailto:cwau5865@netvigator.com)

深圳廠址：深圳市福田區八卦四路中樹六號樓 421 室 郵編：518029

TEL: 0755-25875075 82408374 FAX: 0755-25875075 E-mail: [lujiafu@163.com](mailto:lujiafu@163.com)


門市地址：深圳市福田區中航路都會 100 一樓 1A026 TEL: 0755-83014608

CIRCUIT CONFIGURATION (FIGURE 2)

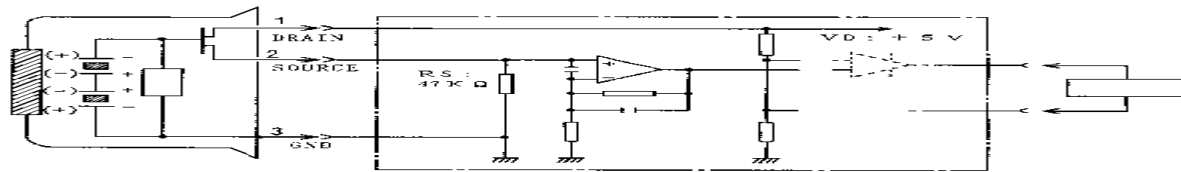

SENSOR  
 \* MEASUREMENT AMP. : NON-INVERTED TYPE. GAIN 72.5 dB AT 1 Hz 0.4~2.7 Hz / -3 dB

TEST SET-UP BLOCK DIAGRAM (FIGURE 3)

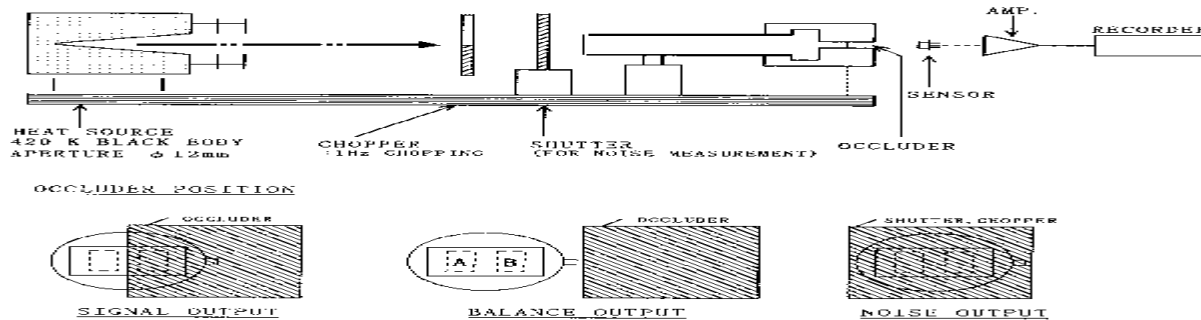

\* NOTES

1. DESIGN RESTRICTIONS/PRECAUTIONS

FOR OUTDOOR APPLICATIONS, BE SURE TO APPLY SUITABLE SUPPLEMENTARY OPTICAL FILTER AND DRIP-PROOF, ANTI-DEW CONSTRUCTION. THIS SENSOR IS DESIGNED FOR INDOOR USE. IN CASES WHERE SECONDARY ACCIDENTS DUE TO OPERATION FAILURE OR MALFUNCTIONS CAN BE ANTICIPATED, ADD A FAIL SAFE FUNCTION TO THE DESIGN.

2. USAGE RESTRICTIONS/PRECAUTIONS

TO PREVENT SENSOR MALFUNCTIONS, OPERATIONAL FAILURE OR ANY DETERIORATION OF ITS CHARACTERISTICS, DO NOT USE THIS SENSOR IN THE FOLLOWING, OR SIMILAR, CONDITIONS.

- A. IN RAPID ENVIRONMENTAL TEMPERATURE CHANGES.
- B. IN STRONG SHOCK OR VIBRATION.
- C. IN A PLACE WHERE THERE ARE OBSTRUCTING MATERIALS (GLASS, FOG, ETC.) THROUGH WHICH INFRARED RAYS CANNOT PASS WITHIN DETECTION AREA.
- D. IN FLUID, CORROSIVE GASES AND SEA BREEZE.
- E. CONTINUAL USE IN HIGH HUMIDITY ATMOSPHERE.
- F. EXPOSED TO DIRECT SUN LIGHT OR HEADLIGHTS OF AUTOMOBILES.
- G. EXPOSED TO DIRECT WIND FROM A HEATER OR AIR CONDITIONER.

3. ASSEMBLY RESTRICTIONS/PRECAUTIONS

SOLDERING -----

- A. USE SOLDERING IRONS WHEN SOLDERING.
- B. AVOID KEEPING PINS OF THIS SENSOR HOT FOR A LONG TIME AS EXCESSIVE HEAT MAY CAUSE DETERIORATION OF ITS QUALITY. (E.G. WITHIN 5 SEC. AT 350 °C)

WASHING -----

- A. BE SURE TO WASH OUT ALL FLUX AFTER SOLDERING AS REMAINDER MAY CAUSE MALFUNCTIONS.
- B. USE A BRUSH WHEN WASHING. WASHING WITH AN ULTRASONIC CLEANER MAY CAUSE OPERATIONAL FAILURE.

4. HANDLING AND STORAGE RESTRICTIONS/PRECAUTIONS

TO PREVENT SENSOR MALFUNCTIONS, OPERATIONAL FAILURE, APPEARANCE DAMAGE OR ANY DETERIORATION OF ITS CHARACTERISTICS, DO NOT EXPOSE THIS SENSOR TO THE FOLLOWING OR SIMILAR, HANDLING AND STORAGE CONDITIONS.

- A. VIBRATION FOR A LONG TIME.
- B. STRONG SHOCK.
- C. STATIC ELECTRICITY OR STRONG ELECTROMAGNETIC WAVES.
- D. HIGH TEMPERATURE AND HUMIDITY FOR A LONG TIME.
- E. CORROSIVE GASES OR SEA BREEZE.
- F. DIRTY AND DUSTY ENVIRONMENTS THAT MAY CONTAMINATE THE OPTICAL WINDOW.

SENSOR TROUBLES RESULTING FROM MISUSE, INAPPROPRIATE HANDLING OR STORAGE ARE NOT THE MANUFACTURER'S RESPONSIBILITY.

MODEL NO. : RE03B	PAGE : 6 / 6	DRAWING NO. : 1604032	REV : A
PART NO. :	© NIPPON CERAMIC CO., LTD.		

香港地址：香港九龍旺角塘尾道 54-58 號永利工業大廈 1405 室 TEL: (852) 23982562 FAX: (852) 23981536

E-mail: [cwau5865@netvigator.com](mailto:cwau5865@netvigator.com)

深圳廠址：深圳市福田區八卦四路中樹六號樓 421 室 郵編：518029

TEL: 0755-25875075 82408374 FAX: 0755-25875075 E-mail: [lujiafu@163.com](mailto:lujiafu@163.com)

門市地址：深圳市福田區中航路都會 100 一樓 1A026 TEL: 0755-83014608