
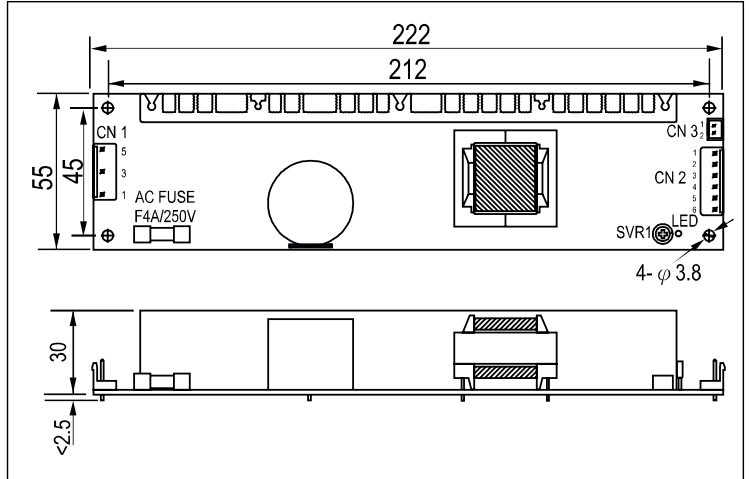


75W Single Output Switching Power Supply

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Built-in remote ON/OFF control
- Cooling by free air convection
- Approvals: UL / CUL / TUV / CB / CE
- 100% full load burn-in test
- 2 years warranty

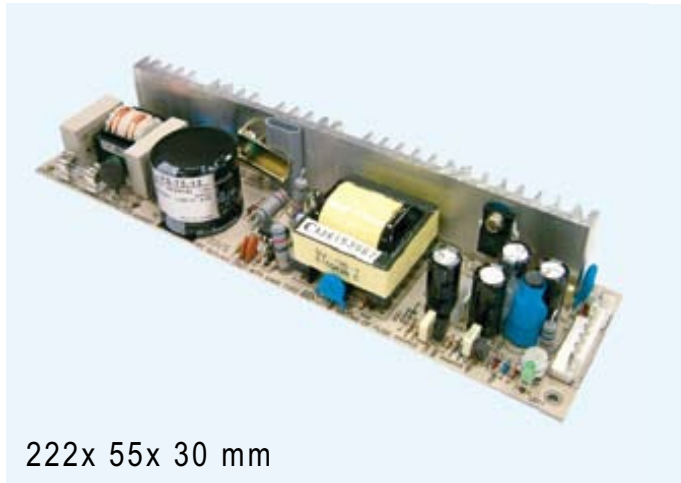

222x 55x 30 mm

- AC input voltage range90~264VAC; 127~370VDC
- AC inrush currentCold start, 36A at 230VAC
- DC adjustment range±10% rated output voltage
- Overload protection115~150% hiccup mode, auto-recovery
- Over voltage protection 115~135% rated output voltage
- Setup, rise, hold up time ...100ms, 35ms, 60ms at full load and 230VAC
- Working temperature-20°C~70°C (refer to output derating curve)
- Safety standardsUL60950-1, TUV EN60950-1 approved
- EMC standardsEN55022 class B, EN61000-3-2,3, EN61000-6-2, EN61000-4-2,3,4,5,6,8,11, ENV50204
- Connection5+6+2P/3.96mm pitch JST B5P/B6P-VH, B2B-XH
- Packing0.3kg ; 48pcs / 15.6kg / 1.12CUFT

Stock No.	Model No.	Output	Tol.	R&N	Effi.
12461	LPS-75-3.3	3.3V, 0~15A	±3%	80mV	69%
12462	LPS-75-5	5V, 0~15A	±3%	80mV	77%
12463	LPS-75-12	12V, 0~6.2A	±2%	100mV	80%
12464	LPS-75-15	15V, 0~5.0A	±2%	100mV	81%
12465	LPS-75-24	24V, 0~3.2A	±2%	120mV	83%
12466	LPS-75-48	48V, 0~1.56A	±2%	120mV	83%